

**NEON ARC | IP67 SNAP CONNECTION INSTRUCTIONS**



Connector 01 / 02

End cap


Flex connector

Snap connection installation guide shows example for Connector 01. Technique is the same for all Arc connectors and end caps.

**NOTE**

- Connections must be fitted to strip correctly for IP67 rating.
- Never wet the assembly units or assemble with wet hands.

**Components**

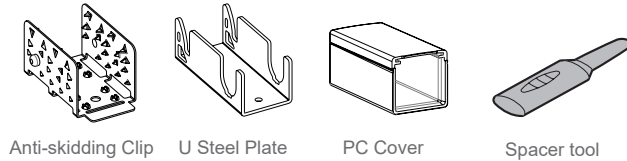


Anti-skidding Clip

U Steel Plate

PC Cover

Spacer tool

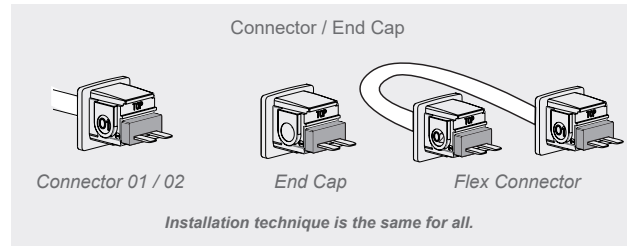


Connector 01 / 02

End Cap

Flex Connector

Installation technique is the same for all.

**Exploded View**

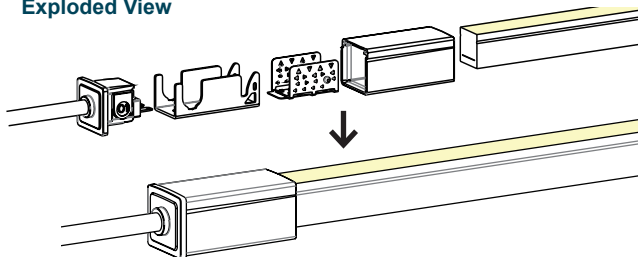



**Step 1: General Connector/End cap information**

- A standard setup will use a connector 01 or 02 at one end, and an end cap at the opposite end.
- For a double power feed (to increase max run length) use connectors 01 and 02 at opposite ends.
- The connectors have an 01 or 02 marked on them. Flex connectors have both 01 and 02 connections to join Neon strip together.

**Step 2: Place PC Cover over strip**

- Place PC cover over strip, paying attention to the direction marked on the bottom of the PC cover.

CONNECTION END TO BE WORKED ON

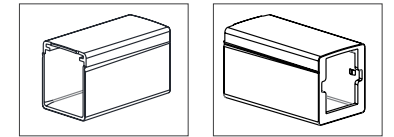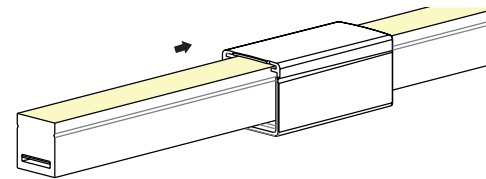


SNAP END OF PC COVER


REAR END OF PC COVER

**Step 3: Use Spacer tool to create a cavity on the backside of the PCB strip**


- Insert the spacer tool to the **backside of PCB** around 10–12mm, move the spacer left and right 3–5 times gently to create a small cavity. This is where the connector/end cap pins will insert.

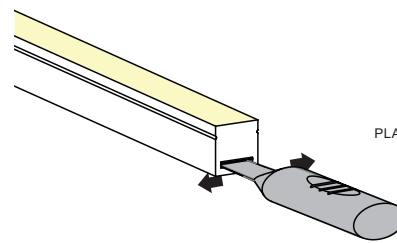


USE SPACER TOOL HERE. CONNECTOR PIN INSERTION PLACEMENT (BACKSIDE OF PCB).



LIGHT STRIP END VIEW




BACKSIDE OF PCB





NEVER INSERT SPACER TOOL TO THE FRONT SIDE OF PCB AS THIS CAN DAMAGE THE LEDS.

**Step 4: Inserting the Connector/End cap** (MAKE SURE CONNECTION END HAS BEEN CUT STRAIGHT)


- Insert the connector/end cap pins into backside of PCB strip, leaving a 2-5mm gap.



2-5MM GAP

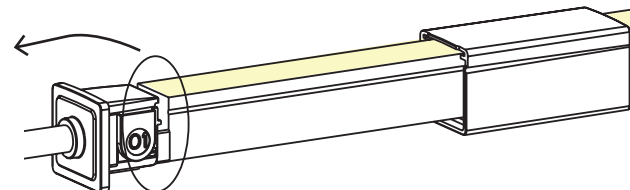

INSERT TO BACKSIDE OF PCB




NEVER INSERT CROSS WISE INTO THE PCB


NEON ARC | IP67 SNAP CONNECTION INSTRUCTIONS

**Step 5: Installation of Anti-skidding clip**



- Unfold the Anti-skidding clip about 20 degrees on both sides.

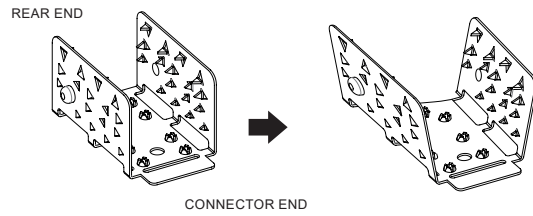


- Place the Anti-skidding clip onto the connection end of the light strip. Make sure you pay attention to its direction and align it with the cut edge on both sides.

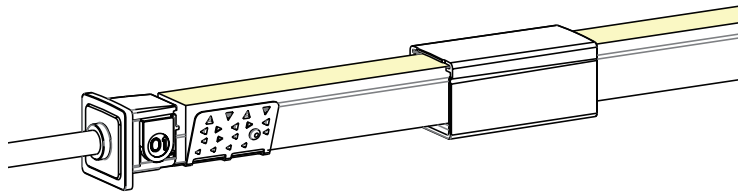

- Fit the Anti-skidding clip to the end of the strip so that wraps rightly.

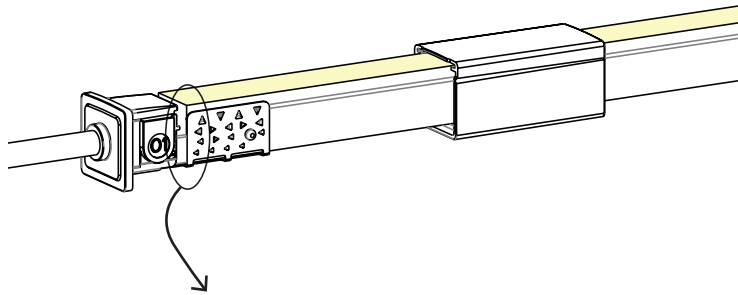


ALIGNED ANTI-SKIDDING CLIP WITH THE CUT EDGE ON BOTH SIDES




NOT ALIGNED TO CUT EDGE

**Step 6: Installation of U steel plate and PC cover**

- Align the connector/end cap and anti-skidding clip with the U steel plate.

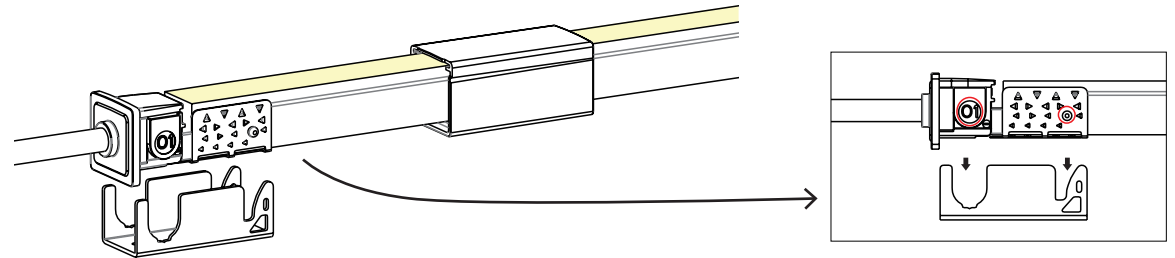

- Press the connector/end cap and light strip downwards at the same time until its clipped into place. This will close the gap between connector and light strip.

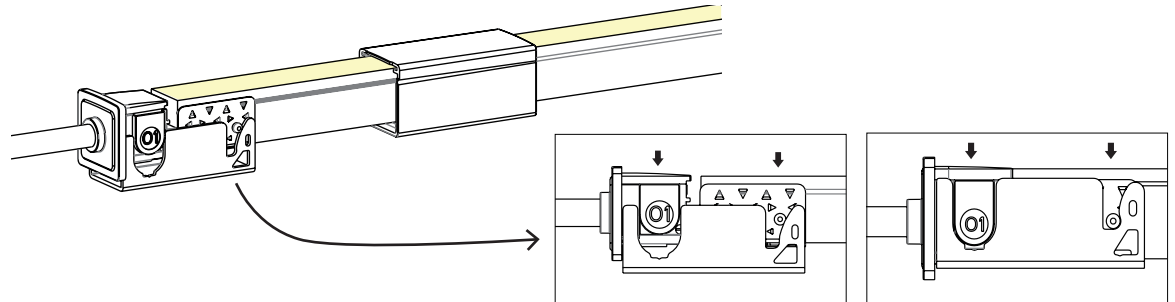

- Slide back the PC cover till it snaps into the connector/end cap.

