


15 WATTS/M | RGB | 2.5M RIBBON + POWER SUPPLY + CONTROLLER | DUAL PURPOSE




15 WATT PER METRE

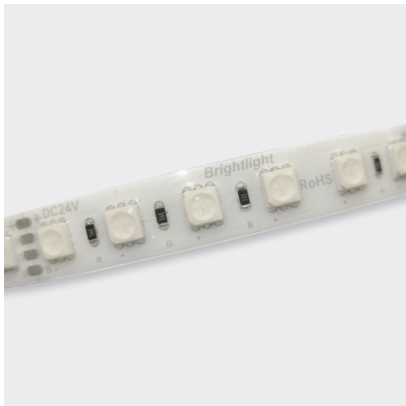

50 WATT POWER SUPPLY

COLOUR	CODE	LUMENS	OUTPUT WATTS
RGB	BL-LS-3003-RGB-IP65	R 125lm/m G 350lm/m B 65lm/m	50W
ELECTRICAL & OPTICAL DATA VARIANCE +/- 10%			
LED WATTS	15W/m	CRI	≥80
INPUT VOLTS	24V DC constant voltage	BEAM ANGLE	120°
OPERATING TEMP.	-20°C ~ +60°C	SOURCE LIFE	50,000 hours
MAX. RUN PER POWER FEED	10 metres	WARRANTY	3 years
INGRESS PROTECTION	Dual purpose for indoor & outdoor use. IP65 achieved with silicone spray	MOUNTING	3M adhesive backing <i>A Bright Light approved aluminium profile for thermal management is required</i>
		CONTROL	3-channel controller (included)
		OUTPUT AMPS	2.08A
		POWER FACTOR	0.90
		INPUT VOLTS	200–240V AC
		AC INRUSH CURRENT	75A peak @ 230V
		DIMENSIONS	W58 x H18 x L160mm
		INGRESS PROTECTION	Indoor use only

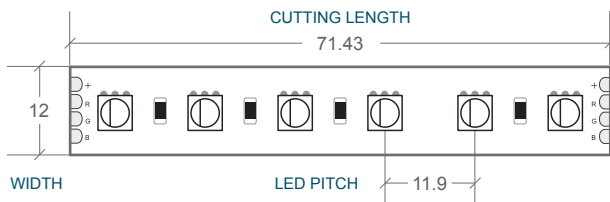

RGB RF CONTROLLER

POWER INPUT	12–24V DC	CONTROLLER DIMENSIONS	L135 × W30 × H20mm
CURRENT LOAD	3A × 3CH (Max. 9A)	REMOTE FREQUENCY	433.92MHz
MAX OUTPUT POWER	108W (12V) / 216W (24V)	INGRESS PROTECTION	Indoor use only