


9 WATTS PER METRE

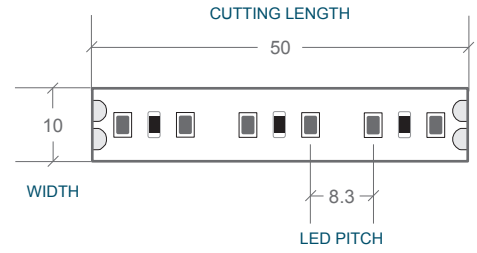

	COLOUR	CODE	INGRESS PROTECTION	LUMENS	EFFICACY
INDOOR	WARM WHITE 3000K	BL-LS-1001-WW	IP20 indoor use only	801lm/m	92lm/W
	NATURAL WHITE 4000K	BL-LS-1001-NW		827lm/m	95lm/W
	COOL WHITE 5000K	BL-LS-1001-CW		835lm/m	96lm/W
IP65	WARM WHITE 3200K	BL-LS-1001-WW-IP65	IP65 achieved with silicone spray	820lm/m	94lm/W
	NATURAL WHITE 4200K	BL-LS-1001-NW-IP65		824lm/m	95lm/W
	COOL WHITE 5700K	BL-LS-1001-CW-IP65		826lm/m	95lm/W
	RED 620–625nm	BL-LS-1001-R-IP65		166lm/m	19lm/W
	GREEN 525–530nm	BL-LS-1001-G-IP65		254lm/m	29lm/W
	BLUE 465–470nm	BL-LS-1001-B-IP65		675lm/m	75lm/W

COLOUR VARIANCE +/- 200K
ELECTRICAL & OPTICAL DATA VARIANCE +/- 10%
SOLD BY THE METRE

LED WATTS	8.7W/m	CRI	≥80	MOUNTING	3M adhesive backing A Bright Light approved aluminium profile for thermal management is required
INPUT VOLTS	24V DC constant voltage	BEAM ANGLE	120°		
OPERATING TEMP.	-20°C ~ +60°C	SOURCE LIFE	50,000 hours		
MAX. RUN PER POWER FEED	12 metres	WARRANTY	3 years	CONTROL	Dimmable by PWM signal