



LED RIBBON STRIP | 13 WATTS PER METRE | IP65

COLOUR	CODE	LUMENS
WARM WHITE 3200K	BL-LS-1002-WW-IP65	1064lm/m
NATURAL WHITE 4200K	BL-LS-1002-NW-IP65	1165lm/m
COOL WHITE 5700K	BL-LS-1002-CW-IP65	1181lm/m

COLOUR VARIANCE +/- 200K
ELECTRICAL & OPTICAL DATA VARIANCE +/- 10%
SOLD BY THE METRE

LED WATTS	12.8W/m
INPUT VOLTS	24V DC constant voltage
OPERATING TEMP.	-20°C ~ +60°C
MAX. RUN PER POWER FEED	10 metres
CRI	≥80
BEAM ANGLE	120°
SOURCE LIFE	50,000 hours
WARRANTY	3 years
MOUNTING	3M adhesive backing <i>A Bright Light approved aluminium profile for thermal management is required</i>
INGRESS PROTECTION	IP65 achieved with silicone spray <i>(can also be used indoors)</i>
CONTROL	Dimmable by PWM signal


ALWAYS UNCOIL BEFORE USE

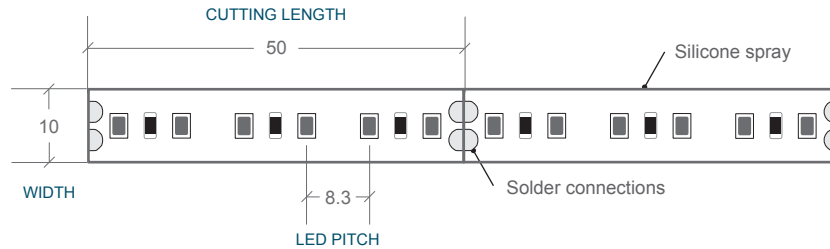

CUT

Cut LED ribbon strip at the cut marks outlined only.


Silicone needs to be applied to all ends to ensure the LED ribbon strip remains water tight.



TO ADD A CABLE CONNECTION

Cut and trim the wires to the appropriate length required. Carefully remove the silicone spray from ends of the LED ribbon strip to be connected (can be scratched off). Solder the wires to the soldering pads at the end of the LED ribbon strip ensuring the correct +/- polarity to form a continuous electrical circuit.



Reapply silicone to completely cover the strip connection point and end to ensure the LED ribbon strip remains water tight.

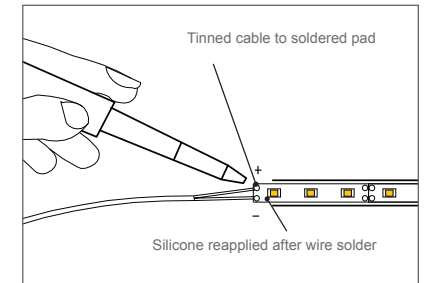

TO MAKE AN END TO END CONNECTION

To connect one length of ribbon strip to another, carefully remove the silicone spray from end of the LED ribbon strips (can be scratched off). Align LED ribbon strips end to end matching the correct +/- polarity between both lengths. Heat and solder the two lengths of ribbon together, using the soldering pads on both strips to form a continuous electrical circuit.


Reapply silicone to completely cover the joint and end to ensure the LED ribbon strip remains water tight.

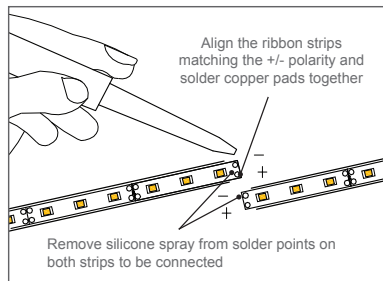

TO PROVIDE A CORNER CONNECTION

Cut and trim the wires to the appropriate length for the corner. Carefully remove the silicone spray from ends of the LED ribbon strip to be connected (can be scratched off). Solder the wires to the soldering pads at end of the LED ribbon strip and to the beginning of the new ribbon strip ensuring the correct +/- polarity to form a continuous electrical circuit.

Reapply silicone to completely cover both connection ends to ensure the LED ribbon strip remains water tight.

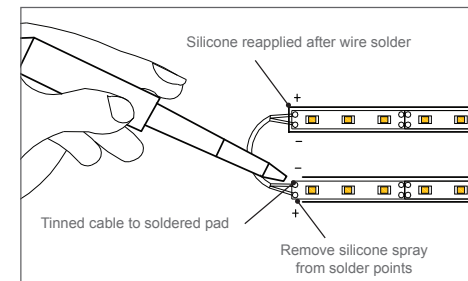

Please note drawings are an installation guide only. Each LED Ribbon Strip application may have variable factors. Cable size may need to be specified to limit the voltage drop throughout the circuit.