

## HIGH BAYS | NON-DIMMABLE



HIGH BAY WITH 110° REFLECTOR



HIGH BAY WITH PRISMATIC REFLECTOR

CODE	LED WATTS	LUMENS	LED EFFICACY	POWER FACTOR	DIMENSIONS	WEIGHT
BL-CS-HB-5001-XX	150W	18,600lm*	124lm/W	0.95	Ø190 × H360mm	4.25kg
BL-CS-HB-5002-XX	200W	24,600lm*	123lm/W	0.95	Ø225 × H370mm	5.5kg


IES FILES AVAILABLE  
\* LUMENS BASED ON USE WITH 110° REFLECTOR

VOLTS	100–240V AC 50/60Hz input	COLOUR	Natural White 4000K	HOUSING	Aluminium heatsink
OPERATING TEMP.	-20°C ~ +50°C	CRI	80	FINISH	Silver
		BEAM ANGLE	60°, 90°, 110°, and prismatic reflectors available	MOUNTING	Hanging by pothook
		SOURCE LIFE	50,000 hours	INGRESS PROTECTION	Indoor use only
		LED BRAND	Philips 3030	DRIVER	Mean Well HLG
		WARRANTY	5 years	CONNECTION METHOD	2m double-insulated 3-core flex
		COMPLIANCE		CONTROL	Non-dimmable

## REFLECTORS

ACCESSORY	CODE
ALUMINIUM	60° BL-CS-HB-500X-60
	90° BL-CS-HB-500X-90
	110° BL-CS-HB-500X-110
PRISMATIC	BL-CS-HB-500X-PRIS


CHOICE OF ONE REFLECTOR INCLUDED  
WITH EACH HIGH BAY




60° Aluminium  
Ø323 × H191mm



90° Aluminium  
Ø472 × H153mm





110° Aluminium  
Ø490 × H123mm



Prismatic  
Ø413 × H273mm

CONE DIAGRAMS

150 WATTS

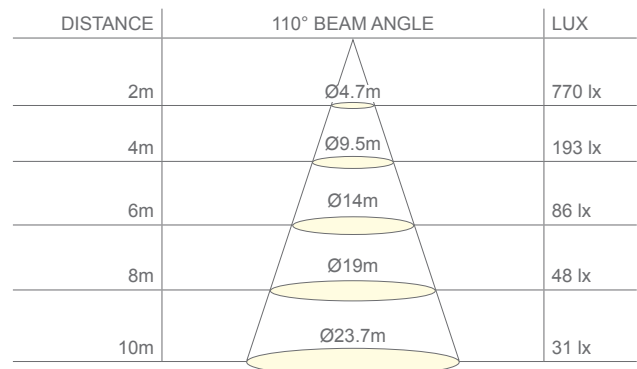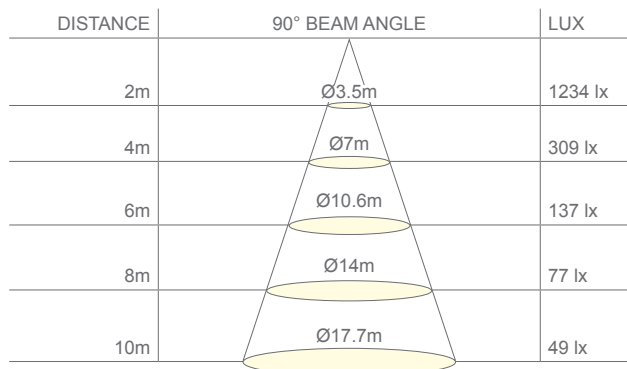

200 WATTS

