


## G50 DOWN LIGHT




COLOUR	CODE	LENS	BEAM ANGLE	LUMENS
WARM WHITE 3000K	BL-DL-103D-WW	Clear	60°	550lm
	BL-DL-103D-F-WW	Frosted	Wide	500lm

MOUNTING TRIM SOLD SEPARATELY  
35W HALOGEN EQUIVALENT

LED WATTS	6W
SYSTEM WATTS	8W
VOLTS	220-240V AC 50/60Hz input
OPERATING TEMP.	-35°C ~ +70°C

CRI	90
LED BRAND	Single COB Luminus LED with reflector
SOURCE LIFE	50,000 hours
WARRANTY	3 years
COMPLIANCE	

DIMENSIONS	<i>Module</i> Ø46 × H46.5mm  <i>Dimmable Driver</i> W46 × H30 × L110mm
HOUSING	Aluminium
MOUNTING	For use with Bright Light mounting trims
INGRESS PROTECTION	Indoor use only
CONNECTION METHOD	External driver with concealed screw terminals
CONTROL	Dimmable  <i>Compatible with a range of trailing edge or universal dimmers; contact Bright Light for more information</i>

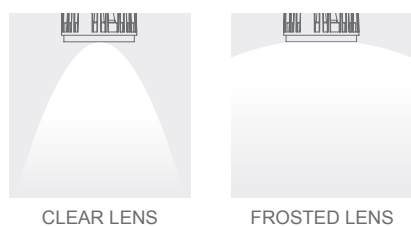

## CONE DIAGRAM

3000K

DISTANCE	60° BEAM ANGLE	LUX
1m	Ø1m	530 lx
2m	Ø2m	132 lx
3m	Ø3m	58 lx